


Tent Event Double Doors

Installation Instructions





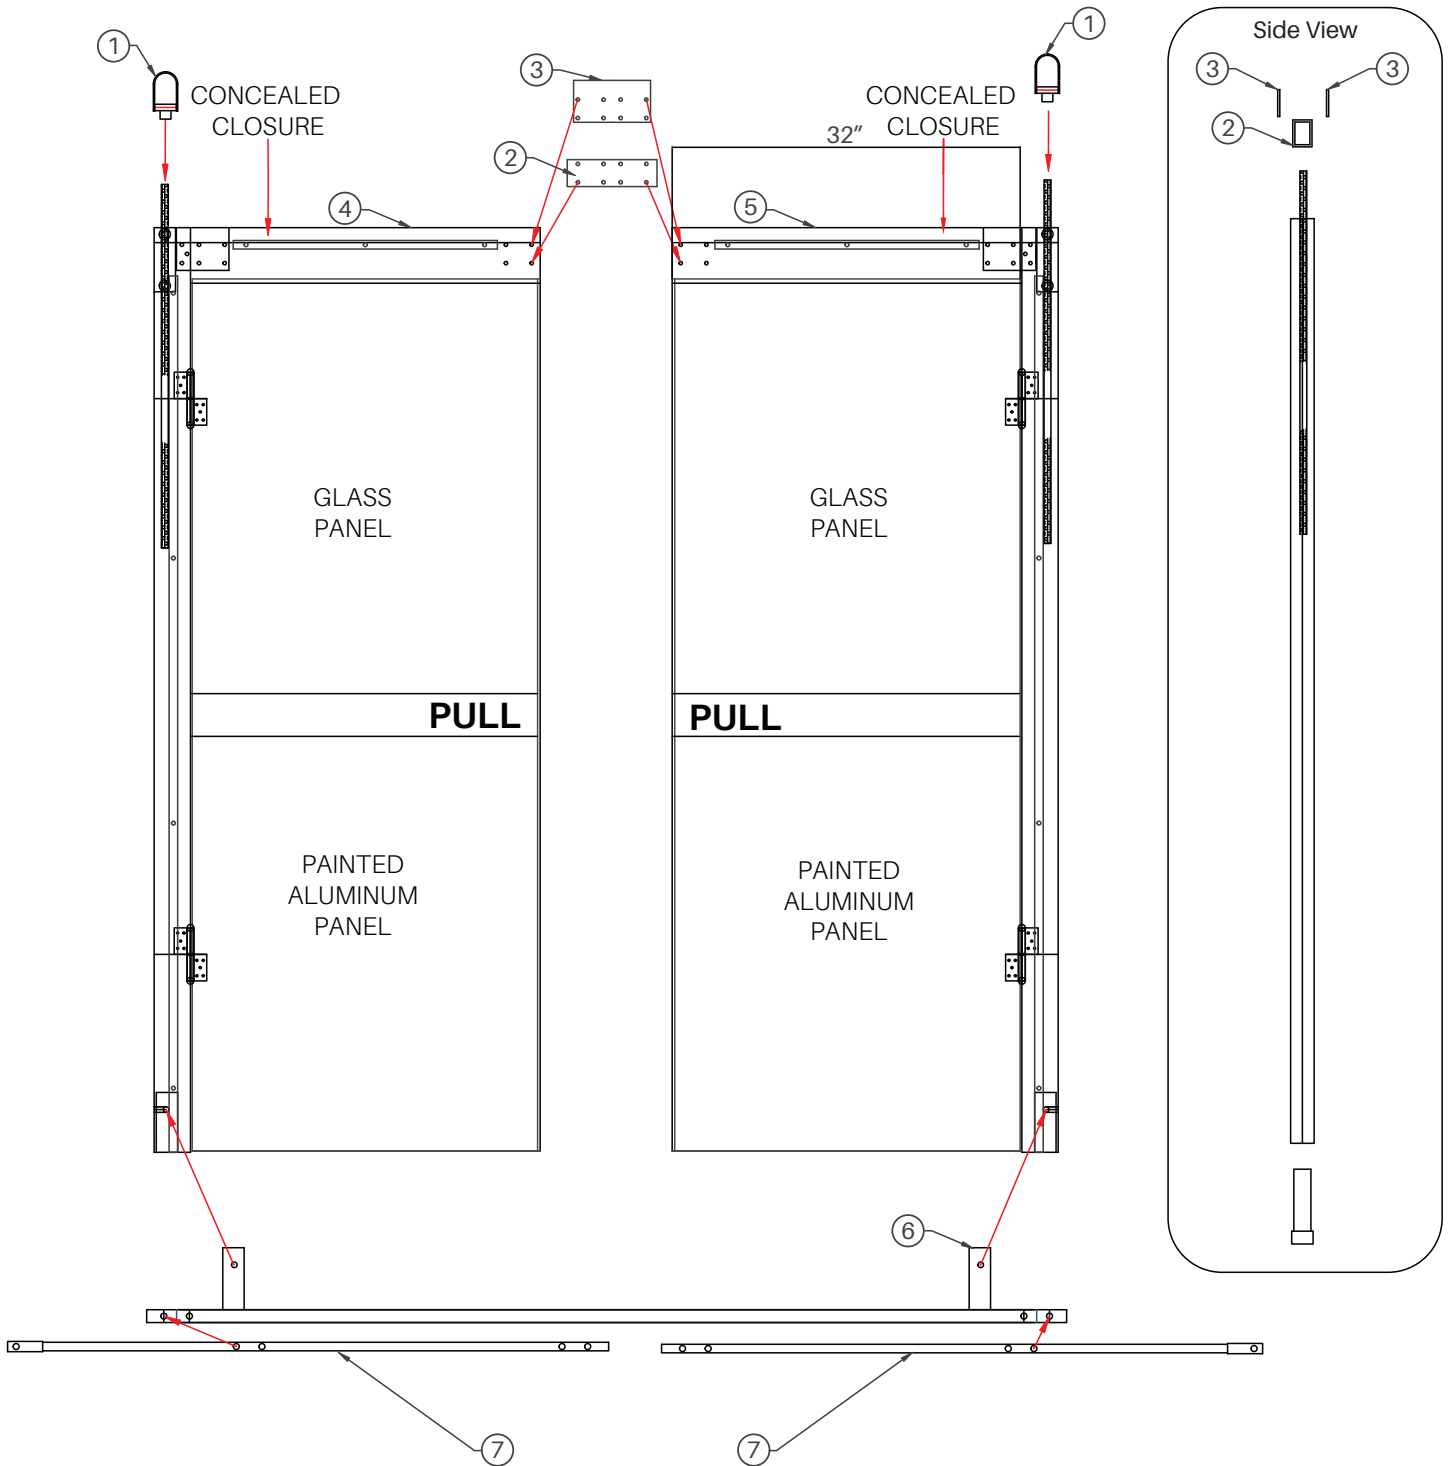


Part #: EVENTDDOOR8ALUM




Tent Event Double Doors

Installation Instructions

Part #: EVENTDDOOR8ALUM

Number	Product Description	Image	Qty
1	2" Mounting brackets		2
	2.5" Mounting brackets		2
2	Connecting tube		1
3	Connecting steel plate		2
4	Left door		1
5	Right door		1
6	Base bar threshold		1
7	Telescopic bar for inside of threshold		2
	Installation hardware and tools		1 Set
	Wood shipping crate		1

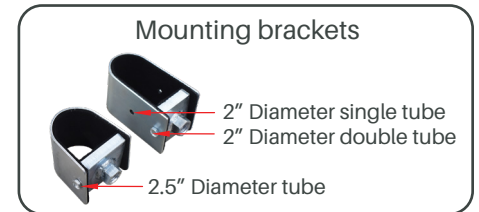

Set Up Instructions:

1. Remove all contents from wooden shipping crate.




2. Position each door (left #4 and right #5) on the ground on top of a drop cloth. Pull handles will be facing down.

Tent Event Double Doors

Installation Instructions


Part #: EVENTDDOOR8ALUM

3. At the header of each door insert the connecting tube (#2) into each side of the frame.

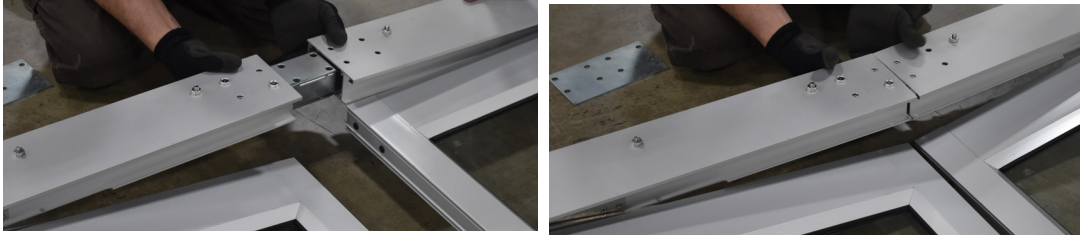

4. Connect the doors by bolting two connecting steel plate (#3) on each side of the frame while the doors are on the ground.

NOTE: The bolts will go through the connecting steel plates and the connecting tube. Be sure the pre-installed hook and loop sidewall connection fabric strip does not get bolted under the connecting steel plates.

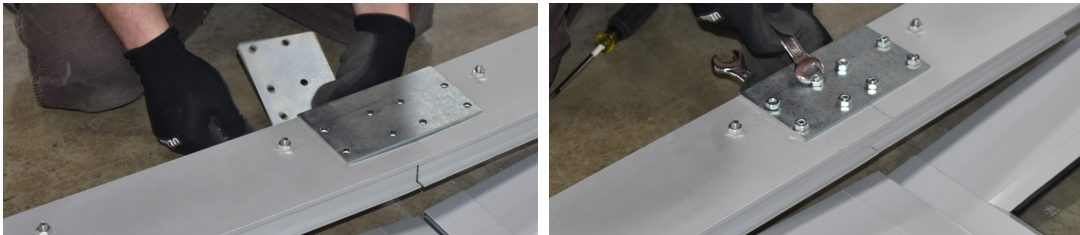

5. Insert the telescopic bar fittings (#7) to the base bar threshold fitting (#6) and bolt. Repeat on opposite side of the base bar threshold fitting.



6. At the bottom of the door frame insert the base bar threshold fitting on each side and bolt.





Tent Event Double Doors

Installation Instructions

Part #: EVENTDDOOR8ALUM

7. Turn out the threaded rod and attach the bottom of the mounting bracket (#1) to fit the tent frame being used. Adjust the threaded rod to correct length based on tent's eave height. Repeat at opposite side.

NOTE: The threaded rod is about 3ft long. The tent doors can be fit to a tent with an 8ft-10ft eave height. Suggested lengths to extend the rod are approximately 8" for 8ft legs, 20" for 9ft legs, and 30" for 10ft legs. **CELINA only stocks sidewall packages to fit 8' eave heights, all other sizes will be special order custom items.**

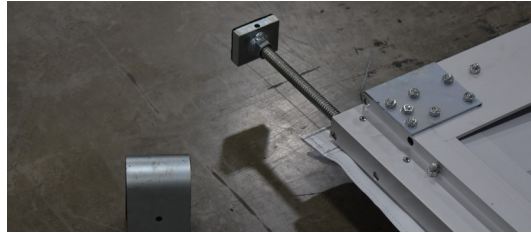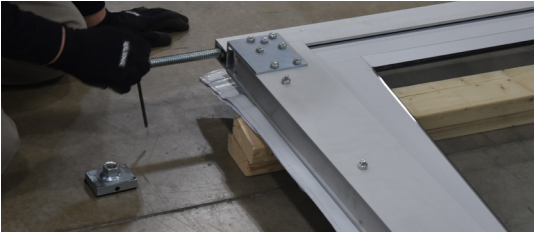

8. Lift both doors together to vertical position after assembling on the ground. Make sure both doors are held secure when they are being set vertically.



9. Hang the doors to the spreader by the (#1) mounting brackets. The square part of the mounting bracket will rest on the bottom of the spreader. Bolt the "U" shape part of the mounting bracket around the spreader and through the bottom of the bracket. Repeat on opposite side.

NOTE: Two sets of mounting brackets are included to accommodate 2" diameter single and double tubing and 2.5" diameter tubing.



10. Install the threshold's telescopic bar fittings (#7) around each leg and bolt in place.



Tent Event Double Doors

Installation Instructions

Part #: EVENTDDOOR8ALUM

11. Adjust the doors using a level or plumb line. Make sure the doors operate freely while the door frame is being held in place.
12. Place a tent stake (not included) through the holes on each side of the threshold to secure in place.



13. Adjust the tightness of the doors hidden closures by turning the speed adjusting valve to the desired speed setting.




14. Install the sidewall connection packages to the tent door's pre-installed hook and loop sidewall connection strip.

Pole tent conversion set up

To convert the double doors to be used with a pole tent you will need two pole tent conversion fittings (#8), one spreader and two standard 8ft CELINA side poles. The spreader and side poles are not included. **See drawing on page 6.**

1. Connect the pole tent conversion fittings (#8) to each end of the spreader and pin in place. Spreader (2AST80) can fit either a 7.5' or 10' span. Spreader (2AST140) can fit a 15' span.

NOTE: There are two holes on pole tent conversion fitting. Two pole tent conversion fittings connect to the ends of spreader (2AST80) to make a 7.5' bay span or a 10' bay span. Pin the closest holes of the conversion fitting for a 7.5' bay span and pin the farthest holes of the conversion fitting for 10' bay span. Two pole tent conversion fittings connect to the ends of spreader (2AST140) at farthest holes for 15' bay span.

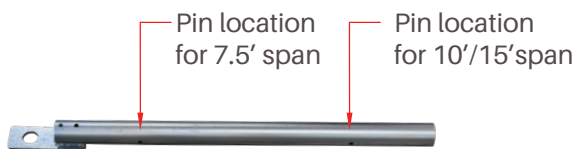


2. Attach the pole tent conversion assembly between the two poles, by placing the side pole in through the hole on each side of the assembly.
3. Adjust the height as needed.
4. Place the mounting brackets (#1) around the spreader and pole tent conversion fitting and bolt mounting bracket in place.

Tent Event Double Doors

Installation Instructions

Part #: EVENTDDOOR8ALUM

Pole tent conversion set up

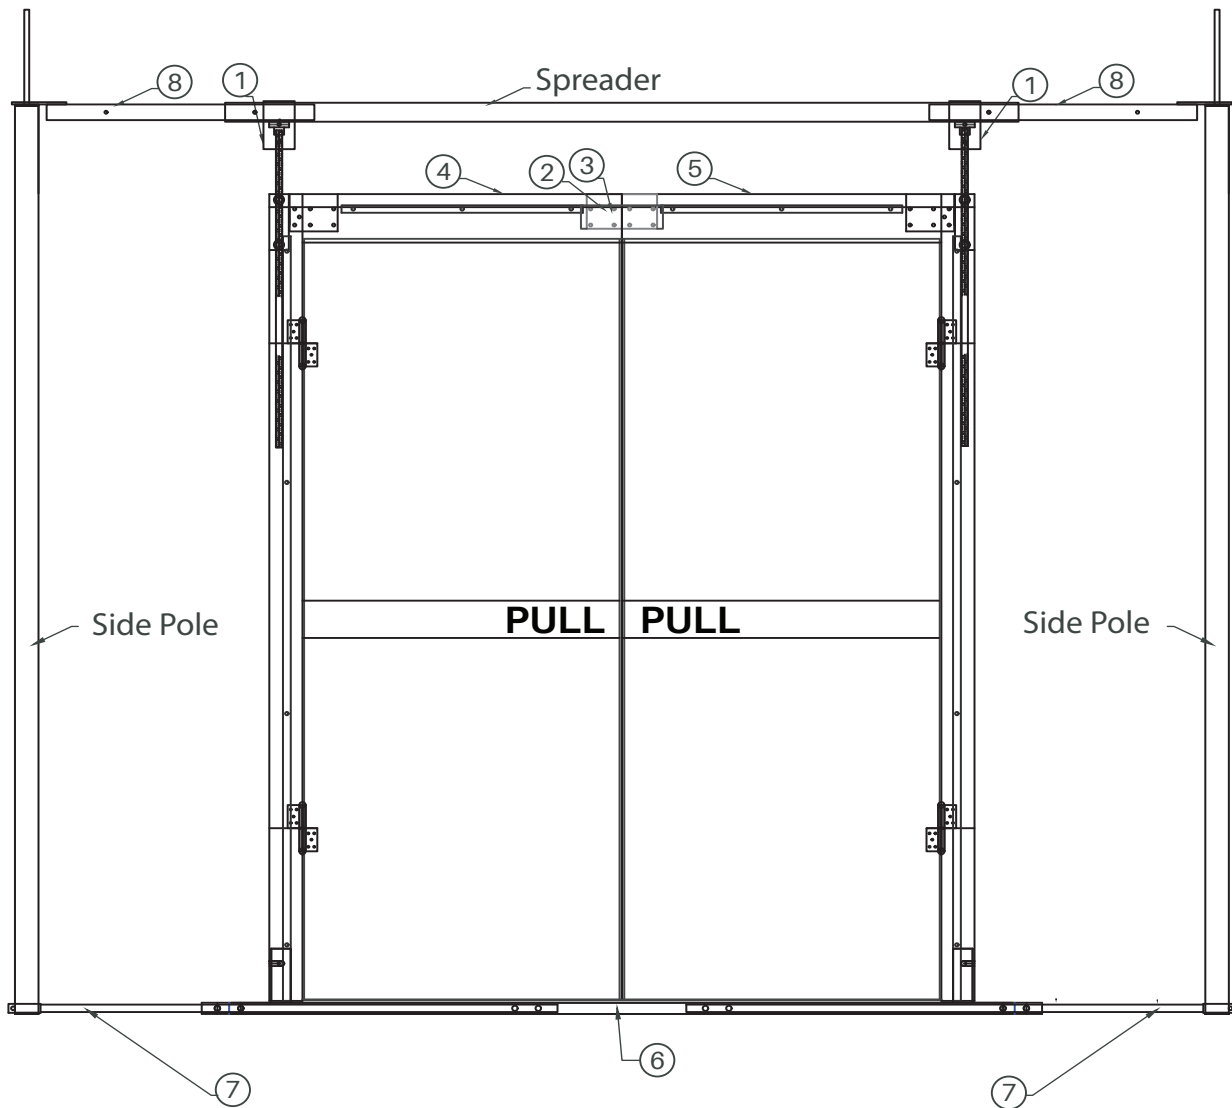

Number	Product Description	Image	Qty
8	Pole tent conversion fitting		2