

12' FRAME TENT JACK / LIFT PRODUCT MANUAL

ver.20170106



Read this manual before using this product. Failure to do so can result in serious injury.

SAVE THIS MANUAL



NOTICE

The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the user that common sense and caution are factors which cannot be built into this product, but must be supplied by the installer and/or user.

SUPPORT

For technical questions or replacement parts, please contact:

Celina Tent, Inc. / GetTent.com / www.GetTent.co.uk

5373 State Route 29

Celina, Ohio 45822-9210 USA

Telephone: 419-586-3610

Fax: 419-584-0949

Website: www.GetTent.com

Email: support@celinatent.com

YouTube: <http://www.youtube.com/user/celinatent>

Facebook: <http://www.facebook.com/celinatent>

Google +: <http://goo.gl/qvVdv>

Twitter: <http://twitter.com/celinatent>


LinkedIn: <http://www.linkedin.com/company/celina-tent-fabric-structures>



A Division of CELINA TENT

INSTALLATION INSTRUCTIONS


1. Unwrap and lay out all pieces.
2. Install the wheels:
 - a. Locate the wheel axel; it will have a pin in each end, two washers, and two barrels.
 - b. Remove one end pin by bending the tines straight, sliding off all of the other hardware with the exception of one washer.
 - c. Insert the axel through one wheel, then add a barrel piece.
 - d. Slide the axel through the welded tubes on the base of the jack frame.
 - e. Add the second barrel to the axel, followed by the second wheel and the second washer.
 - f. Insert the pin through the axel, bending it to keep it in place.

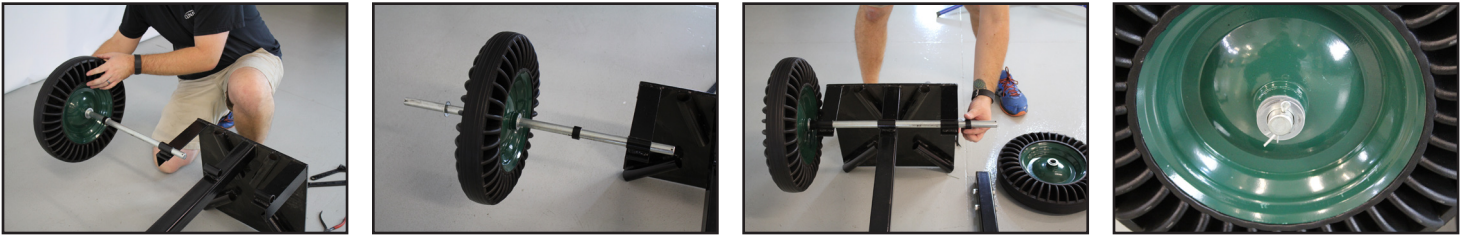


3. Locate the winch assembly arm; remove the nut and washer from the winch's handle assembly, sliding on the handle and reattaching the washer and nut.



4. Unroll the winch cable so that there is enough slack to move the upper beam above the jack frame piece.

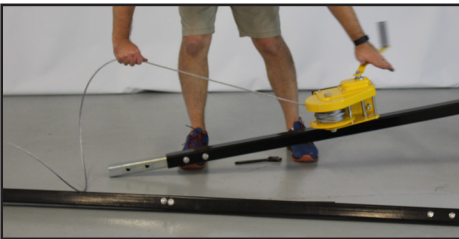


5. Align the upper beam with the jack frame piece; make sure that the cable is not twisted around the beams. If the jack is being assembled with the base plate downward, the kickstand will be on the right side of the beam looking from the wheels. Make sure the cable runs straight from the winch to the pulley at the top of the upper beam.

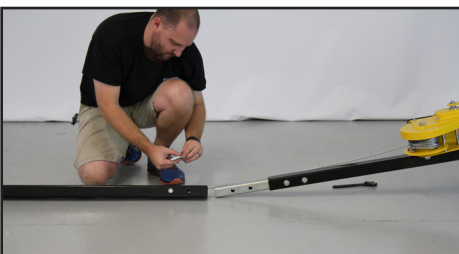

INSTALLATION INSTRUCTIONS



6. Remove the bolts in the bottom of the upper beam; slide the beam onto the jack frame insert, replacing and tightening the bolts.

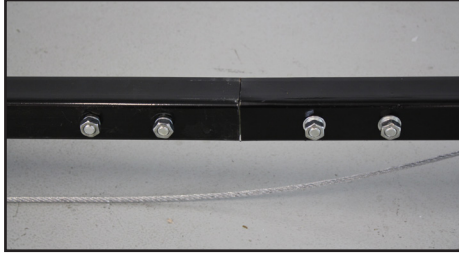

The newly assembled frame tent jack is now ready to use.

Notable features:

- The kick stand on the upper beam portion is for use if the jack is laid down on the ground with the winch down; this keeps the winch handle from hitting the ground and bending. The kick stand operates on a dimple lock system when not in use, where a nub on the stand aligns with a hold in the upper beam to keep it in place when not in use.

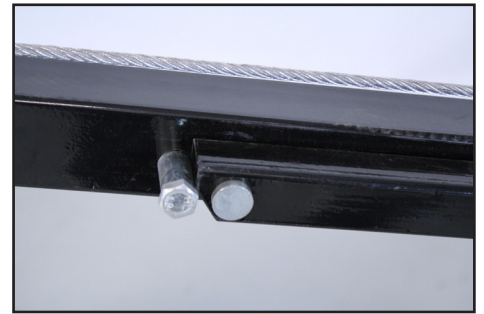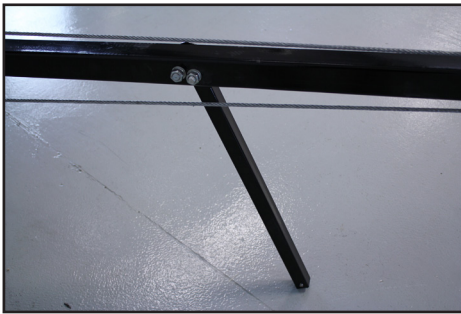

- For added stability, tent stakes may be inserted into the four welded tubes on the base to add area to the jack base. Simply slide the stakes in toward the center of the base.



PRODUCT WARRANTY

Celina Tent Inc. warrants that this product will be free from defects in material and workmanship for a period of one (1) year following the date of purchase. Defects are limited to any defect which is a result of the manufacturing process. Excluded are holes, punctures, or other damages which can be caused during normal installation of a tent whenever proper procedures are not followed. Celina at its option will repair or replace this product or any component of product found to be defective during this warranty period. This warranty is valid for the original purchaser only, and is not transferable. This warranty does not cover normal wear or damage resulting from negligent use or misuse of the product, use contrary to instructions, repairs or alterations by anyone other than Celina, or forces of nature. Celina Tent is not responsible for methods that installers may choose to erect and secure the tent to the ground. Celina's responsibility is limited to the manufacture of the tent parts and materials.

This warranty is in lieu of all other warranties, and there are no warranties, expressed or implied, including warranties of merchantability of fitness for a particular purpose, which extend beyond the description on the face hereof. Celina Tent Inc. shall not be liable for any incidental or consequential damages. Some jurisdictions do not allow the exclusion of implied warranties or the limitation on incidental or consequential damages, so the above exclusions and limitations may not apply to you.